

SMT1200


High Performance NIR TOP IR LED

SMT1200 consists of an InGaAsP LED mounted on the lead frame as TOP LED package, and is sealed with epoxy resin. It emits a spectral band of radiation at 1200nm.

◆ Specifications

1) Product Name	TOP NIR LED
2) Type No.	SMT1200
3) Chip	
(1) Chip Material	InGaAsP
(2) Peak Wavelength	1200nm typ.
4) Package	
(1) Lead Frame Die	Silver Plated
(2) Package Resin	PA6T
(3) Lens	Epoxy or Silicone resin

◆ Outer dimension (Unit: mm)

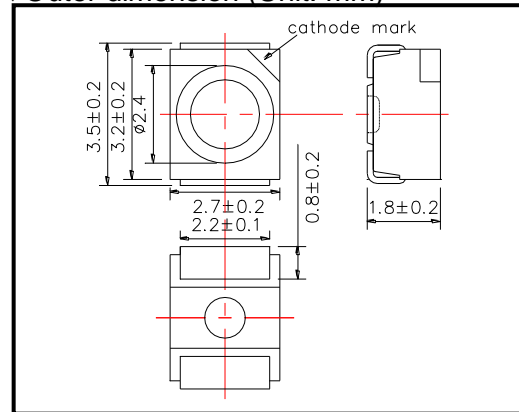

◆ Absolute Maximum Ratings [Ta=25°C]

Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	150	mW
Forward Current	IF	100	mA
Pulse Forward Current	IFP	500	mA
Reverse Voltage	VR	5	V
Thermal Resistance	Rthja	80	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	TOPR	-40 ~ +100	°C
Storage Temperature	TSTG	-40 ~ +100	°C
Soldering Temperature	TSOL	250	°C

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 5 seconds at 250°C


◆ Electro-Optical Characteristics [Ta=25°C typ.]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.0	1.5	V
	VFP	IFP=500mA		1.6		
Radiated Power	PO	IF=50mA		5		mW
		IFP=500mA		22		
Radiant Intensity	IE	IF=50mA		-		mW/sr
		IFP=500mA		-		
Peak Wavelength	λ_P	IF=50mA	1150	1200	1250	nm
Half Width	$\Delta\lambda$	IF=50mA		80		nm
Viewing Half Angle	$\theta_{1/2}$	IF=50mA		±65		deg.
Rise Time	tr	IF=50mA		80		ns
Fall Time	tf	IF=50mA		80		ns


‡Radiated Power is measured by G8370-85.

‡Radiant Intensity is measured by Ando Optical Multi Meter AQ2140 & AQ2743.


Forward Current - Forward Voltage

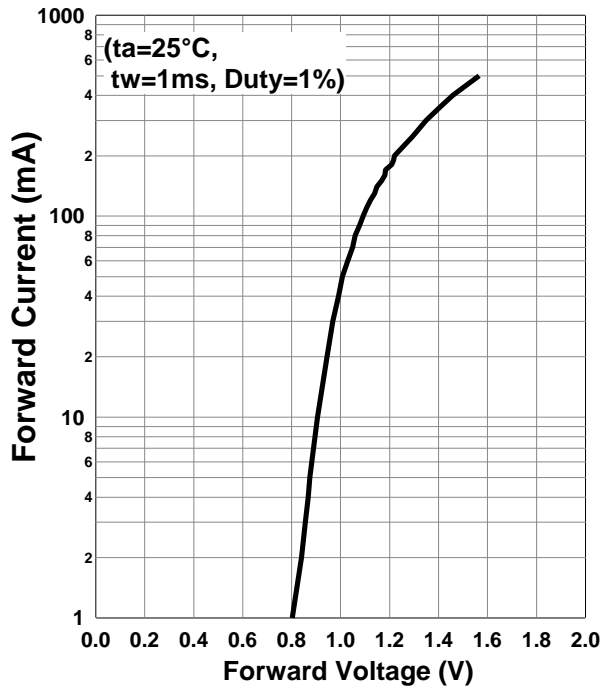


Relative Radiant Intensity - Forward Current

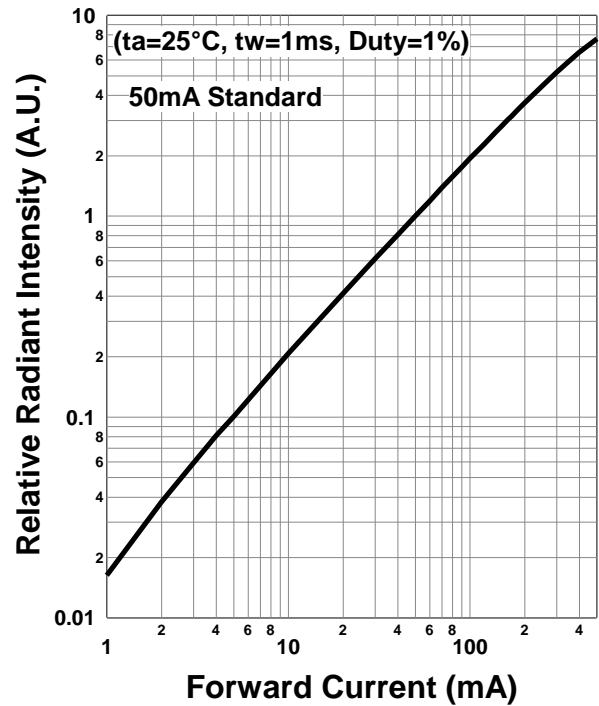


Forward Current - Pulse Duration

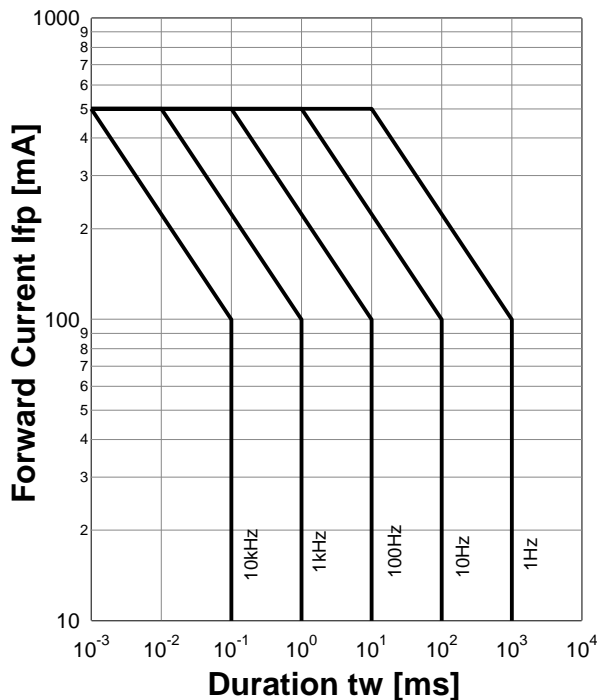


Allowable Forward Current - Ambient Temperature

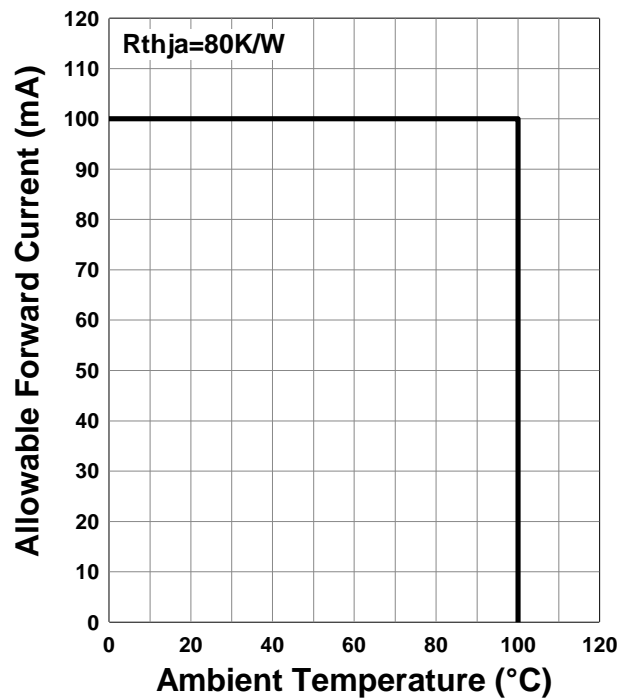


Forward Voltage - Ambient Temperature

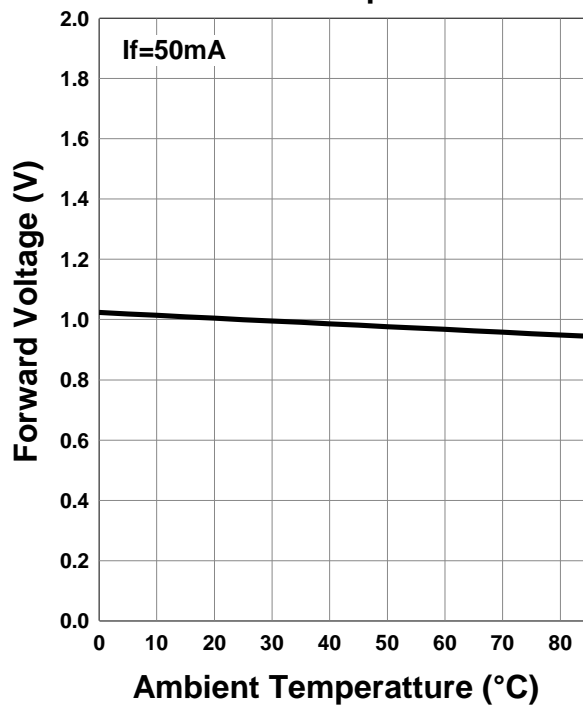


Relative Radiant Intensity - Ambient Temperature

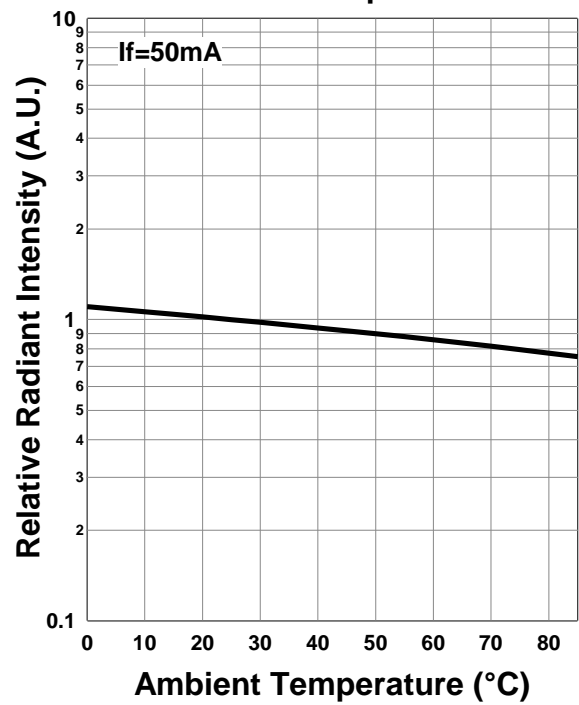


Peak Wavelength - Ambient Temperature

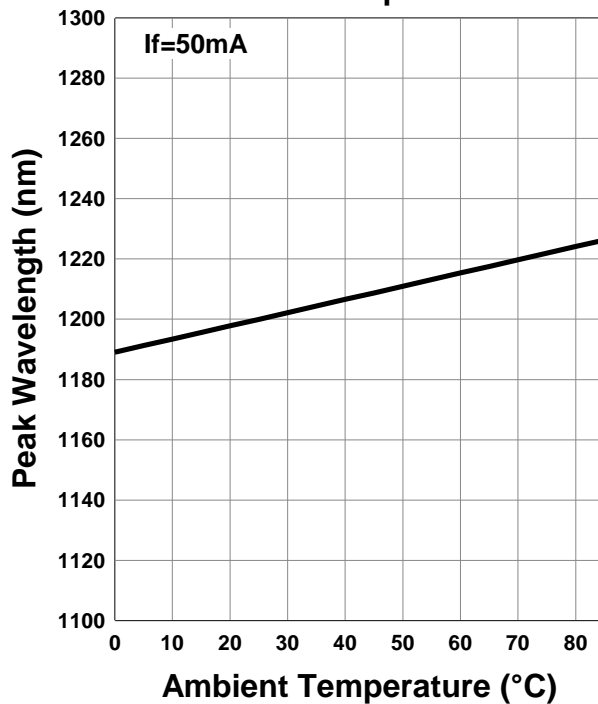


Relative Spectral Emission

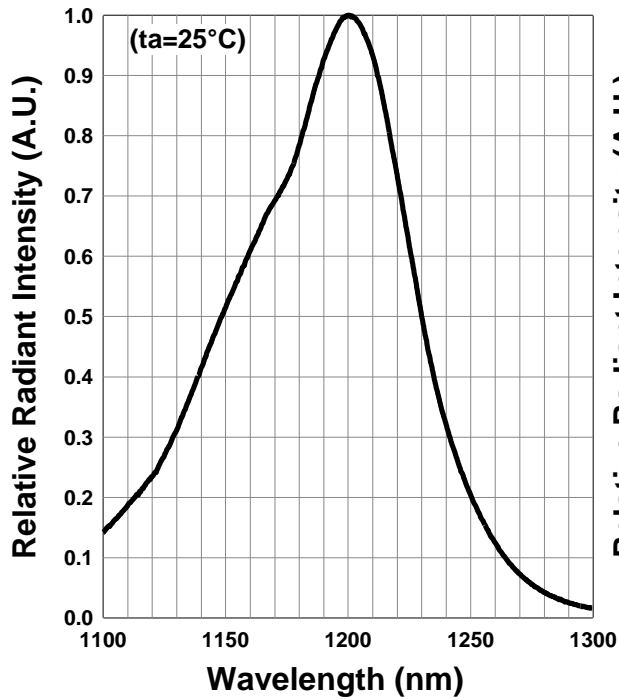

Radiation Characteristics

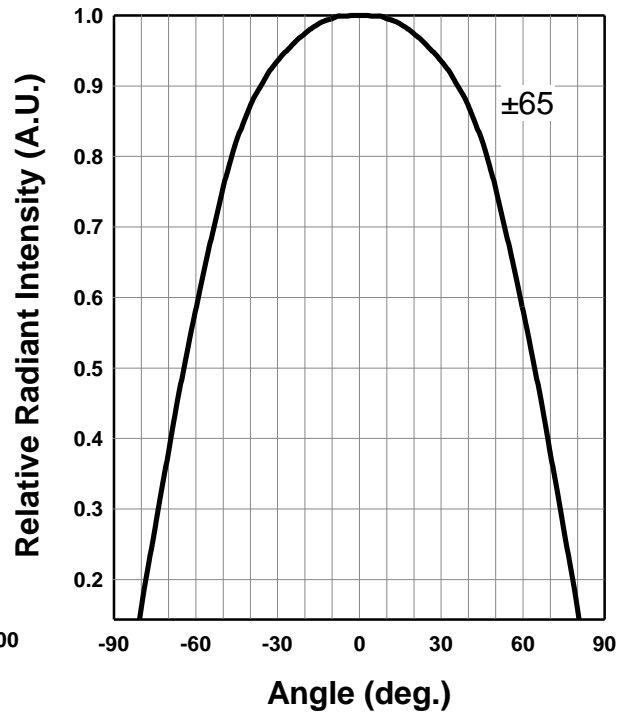



Radiation Characteristics

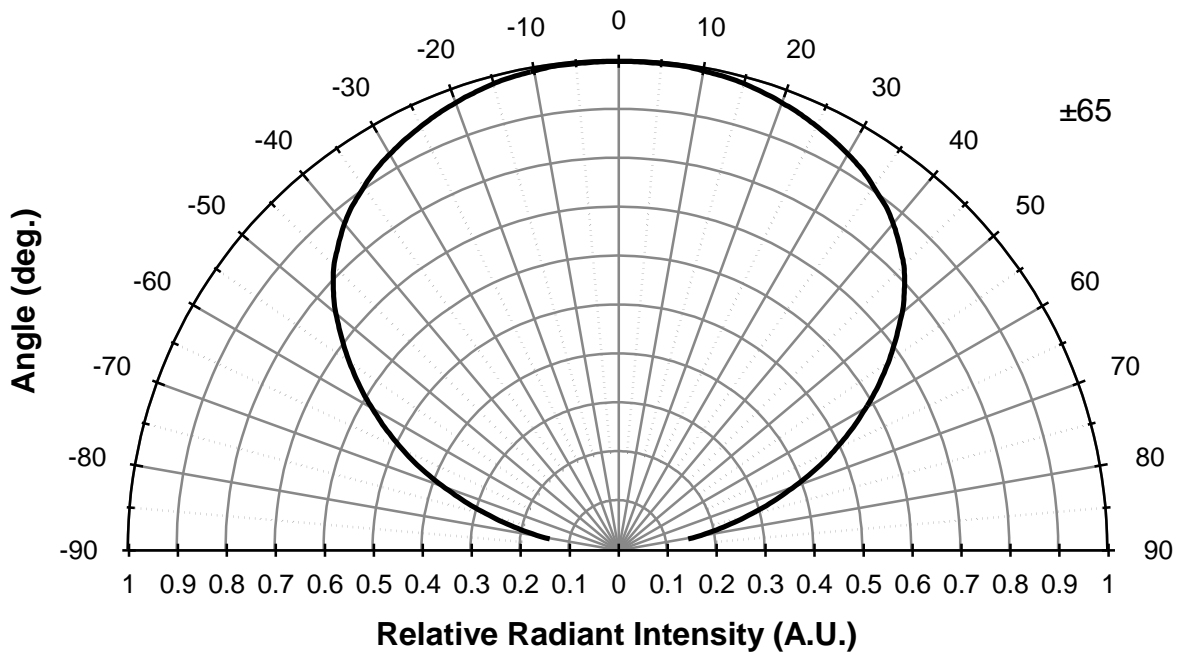

◆SMD Application




◆Recomended Lnd Layout (Unit : mm)

IR-Reflow Soldering Profile for lead free soldering

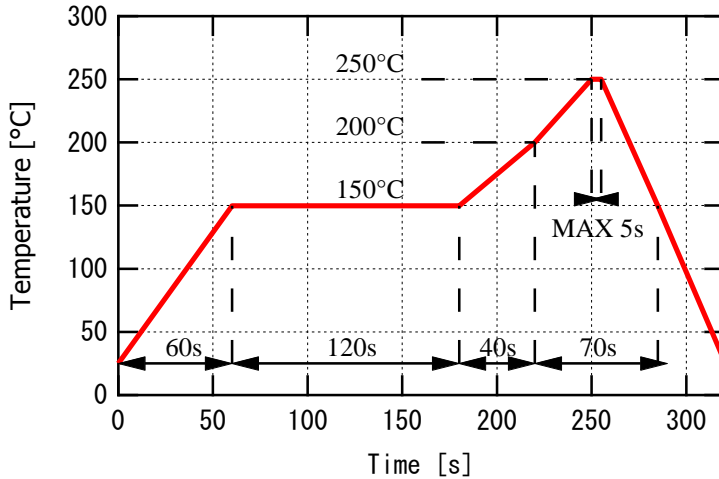

◆SMD Packing

Tape and Reel Dimensions (Unit: mm)

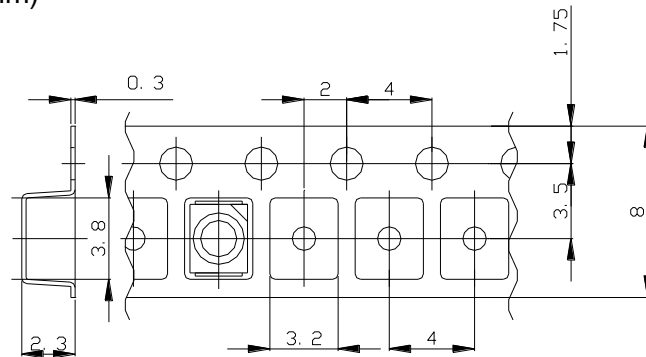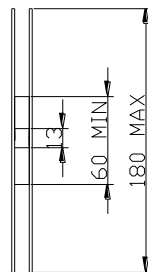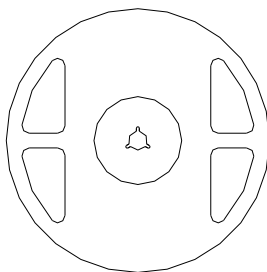

Feeding Direction -->

◆Wrapping

Moisture barrier bag aluminum laminated film with a desiccant to keep out the moisture absorption during the transportation and storage.

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.